




Professional LED Lighting Manufacturer



LED TUBE LIGHT

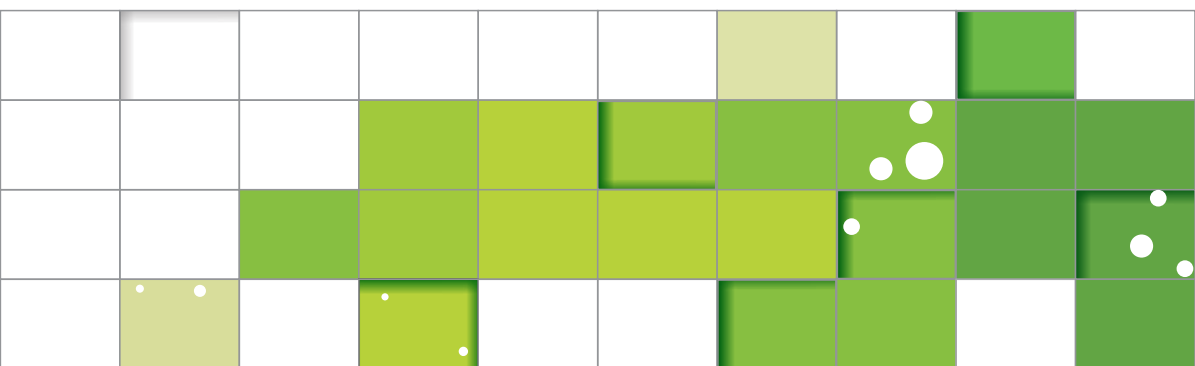

Light the world · Light the future

TECHNOLOGY

QUALITY

SERVICE

LED Tube Light




3 years Warranty

Features

- Saves up to 60% in energy consumption compared to fluorescent lamp
- Reliable LED chip with high luminous efficiency
- Perfect for applications with frequent “on/off” switching cycles
- Instant on, no flicker or noise
- Emits virtually no No uv rays or IR
- Mercury-free and RoHS compliant
- Overpower, short and open circuit protected
- Comply with CE,UL and TUV standards




Construction Profile

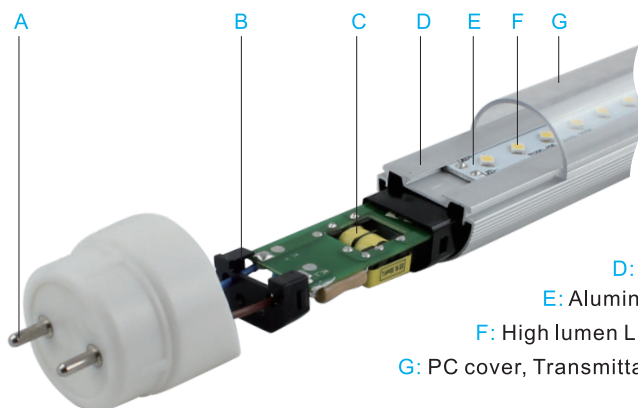

Aluminum Tube

- A: Input Pin
- B: Driver's Housing
- C: Internal Driver
- D: 6063 Aviation Aluminum
- E: Aluminum PCB, good for heat conduction
- F: High lumen LED, CRI>80Ra
- G: PC cover, Transmittance>95% (clear), >85% (frosted)

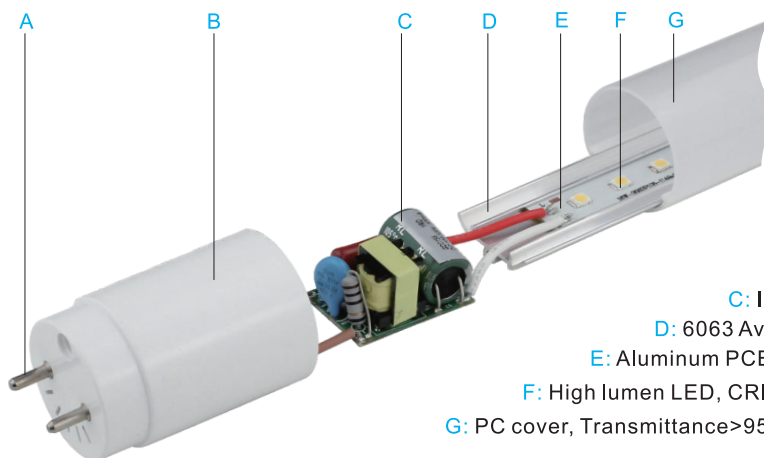

Plastic Tube

- A: Input Pin
- B: lamp holder
- C: Internal Driver
- D: 6063 Aviation Aluminum
- E: Aluminum PCB, good for heat conduction
- F: High lumen LED, CRI>80Ra
- G: PC cover, Transmittance>95% (clear), >85% (frosted)

Series Photos


Clear Cover



Frosted Cover



Product Dimension

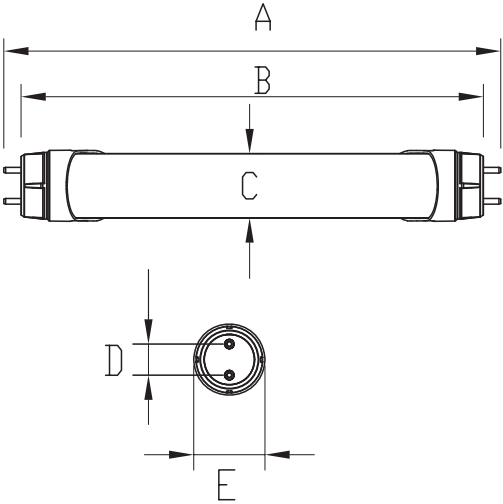

Dim (meter)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
0.6	602	588	26	G13	28.8
0.9	912	898	26	G13	28.8
1.2	1212	1198	26	G13	28.8
1.5	1512	1498	26	G13	28.8
1.8	1776	1762	26	G13	28.8
2.4	2381	2367	30	G13	32

Available Product

Model No.	Dimension (mm)	Rated Power	Input Voltage	Power Factor	Luminous Efficacy	Beam Angle	Base
GE-T610	26x602	10W	AC85~305V, 50/60Hz	>0.9	>100lm/W	180°	G13
GE-T913	26x913	13W	AC85~305V, 50/60Hz	>0.9	>100lm/W	180°	G13
GE-T1218	26x1212	18W	AC85~305V, 50/60Hz	>0.9	>100lm/W	180°	G13
GE-T1523	26x1512	23W	AC85~305V, 50/60Hz	>0.9	>100lm/W	180°	G13
GE-T1830	26x1776	30W	AC85~305V, 50/60Hz	>0.9	>100lm/W	180°	G13
GE-T2450	30x2384	50W	AC85~305V, 50/60Hz	>0.9	>100lm/W	180°	G13

Note: Available color temperature:
Warm white:2700K/3000K/3500K, Natural white:4000K/4500K/5000K, Cool white:5700K/6500K

Lux by meter

10W		13W		18W	
330.00lx	1.0m	391.03lx	1.0m	600.66lx	
82.50lx	2.0m	97.76lx	2.0m	150.17lx	
36.67lx	3.0m	43.45lx	3.0m	66.74lx	
20.62lx	4.0m	24.44lx	4.0m	37.54lx	
20W		23W		25W	
615.65lx	1.0m	745.54lx	1.0m	783.00lx	
153.91lx	2.0m	186.38lx	2.0m	195.75lx	
68.41lx	3.0m	82.84lx	3.0m	87.00lx	
38.48lx	4.0m	46.06lx	4.0m	48.94lx	

Application area

Shopping mall, office, factory, hospital, school etc.



Shenzhen Genice Lighting Technologies Co.,Ltd

Add.:Bldg A,Guangcheng Industrial Park, 37 Zhenxing Rd, Liyuhe Industrial Zone,
Loucun Gongming , Guangming New district, Shenzhen518106, China

Tel.: +86-755-36697000

Fax: +86-755-36697009

E-Mail : sales@geniceled.com